


## Mito sfera 40 datasheet

Ring-shaped LED mirror-wall luminaire with single-sided light output and a diameter of 40 cm. The lighting effect provides glare-free light for perfect illumination. This version features an integrated power supply unit for surface mounting and connects to 230 VAC mains voltage.

The luminaire can be controlled using »touchless control« (gesture control at the head) or Occhio air, or can be dimmed using a trailing-edge phase cut dimmer\*. The color temperature is continuously adjustable between 2700–4000 K (optional 2200 to 3500 K) or can be preset (2700/3000/3500/4000 K) using »touchless control« or Occhio air.


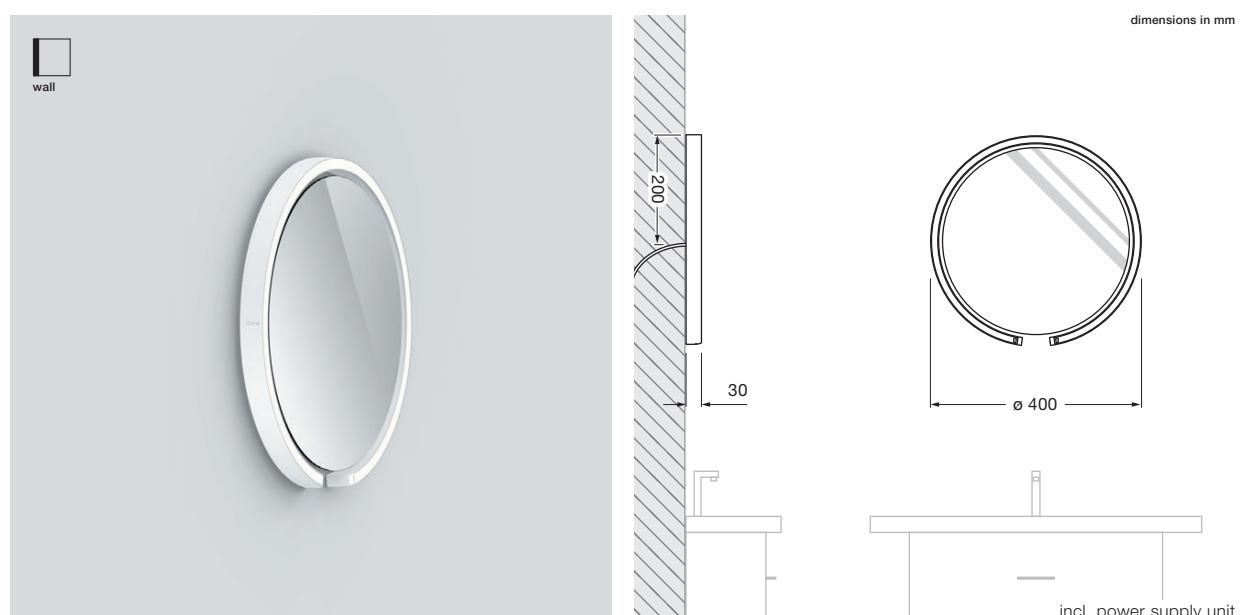


### technical data Mito sfera 40

|                         |   |  |
|-------------------------|---|--|
| properties              | material                                      | aluminium painted or PVD-coated, optical silicone, mirrored glass                                      |
|                         | weight  | 3.8 kg   |
| surface                 | head  | bronze, matt gold, rose gold, matt silver, matt white, matt black, dark chrome, phantom, black phantom |
|                         | mirror  | clear glass, tinted glass  |
| Occhio »color tune« LED | average life time                             | >50.000 hrs  |
|                         | energy efficiency class (luminous efficiency) | G (36 lm/W)  |
|                         | power   | LED 20W (incl. Occhio power supply unit approx. 26 W, standby < 0.5 W)                                 |
|                         | color rendering index                         | high color; CRI Ra 95  |
|                         | color temperature (color consistency)         | 2700–4000 K (3-step)      2200–3500 K (2-step 2200 K, 3-step 3500 K)                                   |
| electricity             | dimming                                       | via trailing-edge phasecut dimmer, »touchless control« or Occhio air (optional)*                       |
|                         | connection                                    | 230 V AC   |
|                         | power factor power supply ( $\cos \phi 1$ )   | 0.9  |
|                         | flicker / stroboscopic effect                 | 1 (PstLM) / 0.9 (SVM)  |
|                         | permitted operating conditions                | ambient temperature 10–30°C, for indoor use only   |

\* For a list of compatible dimmers, see [www.occhio.com/dim\\_en](http://www.occhio.com/dim_en), trailing-edge phasecut dimmer and Occhio air not combinable

## Mito sfera 40 lighting effects

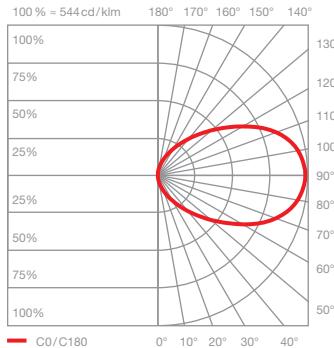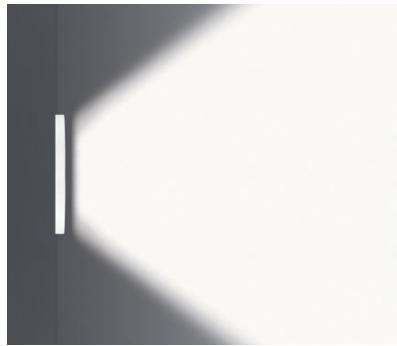**wide**

wide-radiation light, beam angle approx. 90°

inserts: wide

luminous flux: high color 20 W 800 lm


\* The standardized indication of glare values (UGR value – 4H8H) is not quite significant for annular luminaires. In most real applications the result of an individual calculation is a UGR value < 19. Therefore, we recommend to carry out a calculation which can be prepared by our lighting design team (lightingdesign@occhio.de).

# Occhio

## control options

### Control

#### Mito set box

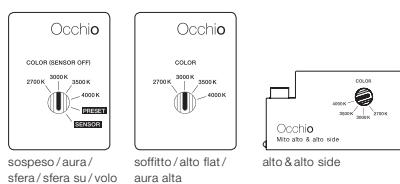

#### sospeso / aura / sfera / volo:

COLOR (Sensor off)  
adjustable color temperature (4 stages)  
trailing-edge phase cut dimming possible

PRESET (sospeso / aura / volo)  
adjustable color temperature (4 stages)  
adjustable up / down light intensity (5 stages)

PRESET (sfera)  
color temperature adjustable (4 stages)  
light intensity adjustable (5 stages)

#### SENSOR


»touchless control« (gesture control)  
switching, dimming, up / down fading\*  
»color tune« (color temperature continuously  
adjustable) no external dimming possible

#### soffitto / alto / alto side / aura alta:

COLOR  
adjustable color temperature (4 stages)  
trailing-edge phase cut dimming possible

\*not with sfera

#### Mito »air« box

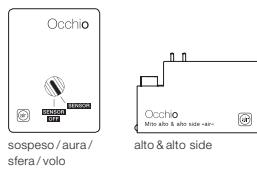

#### sospeso / aura / sfera / volo:

SENSOR  
»air« + »touchless control« (Bluetooth-  
and gesture control)  
control via »touchless control« and Occhio air app  
or »air« controller

#### SENSOR OFF

»air«  
control via Occhio air App or »air« controller  
switching, dimming, up / down fading »color tune«  
(color temperature continuously adjustable)

#### terra / largo / raggio:

»air«, »touchless control« (largo / raggio / terra)  
and »body sensor« (raggio / terra) (Bluetooth-  
and gesture control) control via »touchless control«,  
»body sensor« and Occhio air App or »air«  
controller

»ambient light control« (terra)  
adjustment to ambient light

»presence sensor« (terra)  
presence identification and automatically  
shutdown by presence sensor

deactivation and adjustable via control  
and sensor with »air« app

#### alto / alto side / aura alta:

»air« (Bluetooth - control)  
control via Occhio air App or »air« controller  
switching, dimming »color tune« (color tempera-  
ture continuously adjustable), up / down fading  
(aura alta)

with Mito »air« box no external dimming possible



terra / raggio / largo /  
soffitto / alto flat / aura alta