

Image shown above 73.11a.1, 500mm extender, with pendant anchor kit

|                      |   |
|----------------------|---|
| <b>Mounting</b>      | Ceiling mounted   |
| <b>Glass Colours</b> | Clear, grey 1, grey 2, grey 3   |
| <b>Lamp</b>          | 1W LED, 2700K, 100lm  |
| <b>Extenders</b>     | Available in 150mm, 250mm, 500mm, 1200mm, 750mm (attached with 2 pendants). Up to 2500mm drop   |
| <b>Finish</b>        | Black powder coated   |
| <b>Materials</b>     | Blown glass, black powder coated stainless steel armature, electrical components, matte black canopy  |
| <b>Power Supply</b>  | Integral<br>Bocci recommends remote mounting power supplies for ease of long-term maintenance.  |
| <b>Environment</b>   | Indoor, dry location. IP20  |
| <b>Note</b>          | Pendant anchor kit included.<br><br>Every single Bocci product is handmade. They are blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research. |
| <b>Patent #</b>      | US D762,323 S<br>EU 002633230-0001 - 0003   |

**Certifications**





**Weight (kg)**

|                 |       |
|-----------------|-------|
| <b>73.5a.1</b>  | 21.4  |
| <b>73.8a.1</b>  | 33.6  |
| <b>73.8a.2</b>  | 35.2  |
| <b>73.9a.1</b>  | 39.1  |
| <b>73.9a.2</b>  | 37.3  |
| <b>73.11a.1</b> | 48.6  |
| <b>73.11a.2</b> | 46.7  |
| <b>73.13a.1</b> | 55.1  |
| <b>73.17a.1</b> | 70.8  |
| <b>73.20a.1</b> | 84.6  |
| <b>73.23a.1</b> | 98.5  |
| <b>73.33a.1</b> | 132.2 |



Each product is unique, there may be a variance in the weight up to 10%.

**73.5A.1**

All dimensions are in millimeters (mm) unless otherwise specified.


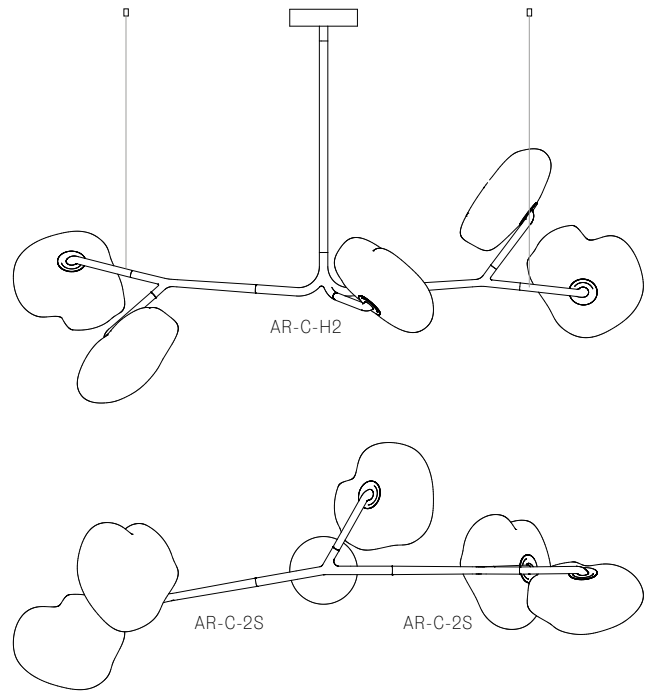
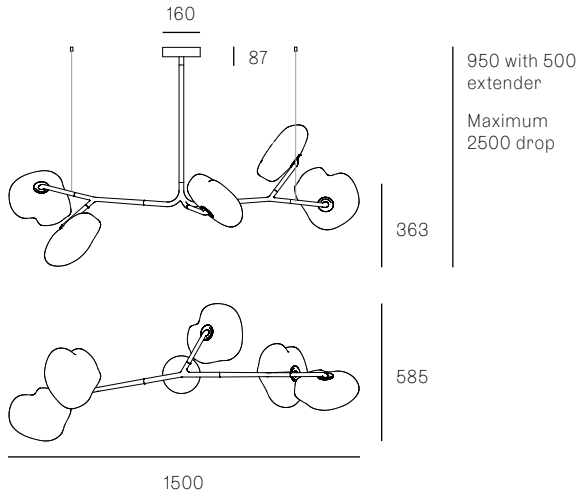


**73.8A.1**

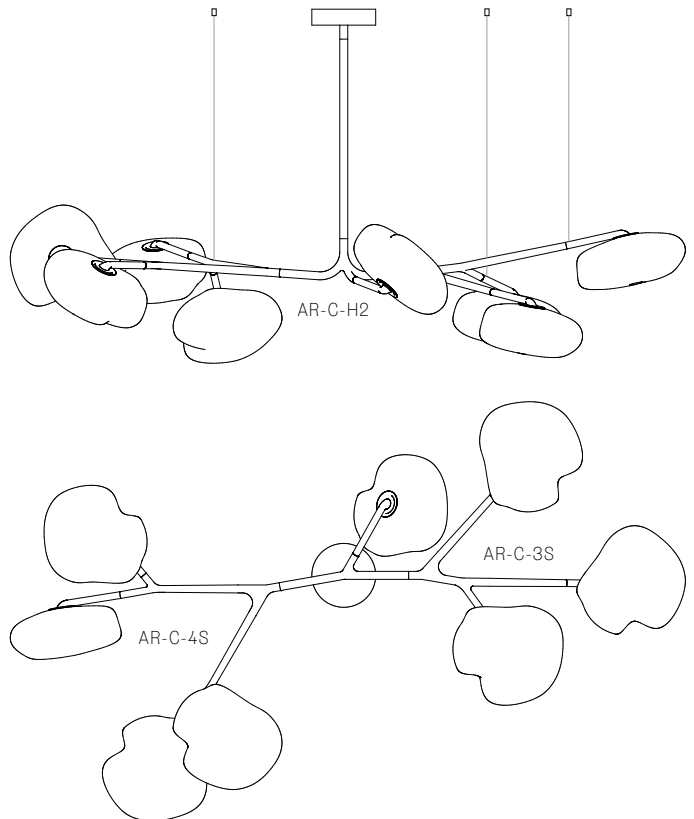
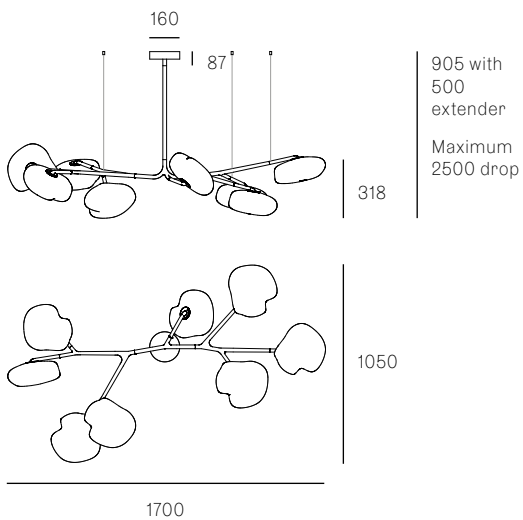


73.8A.2

All dimensions are in millimeters (mm) unless otherwise specified.

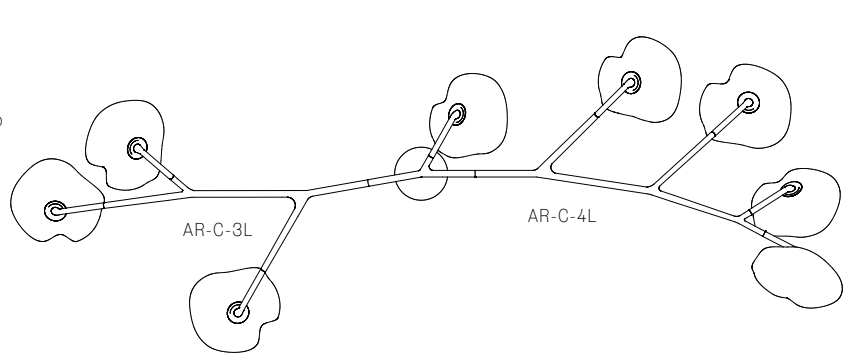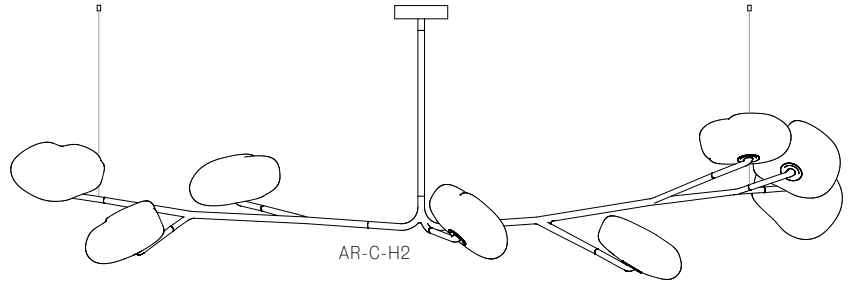
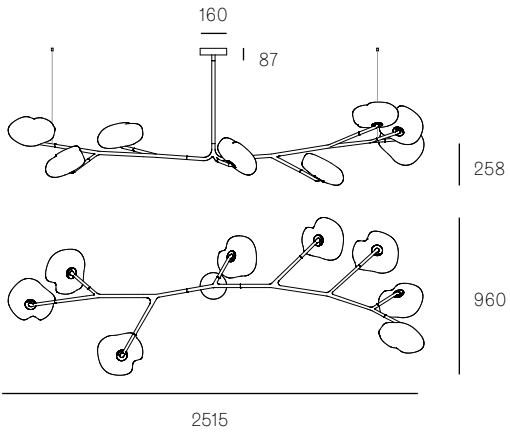


73.9A.1

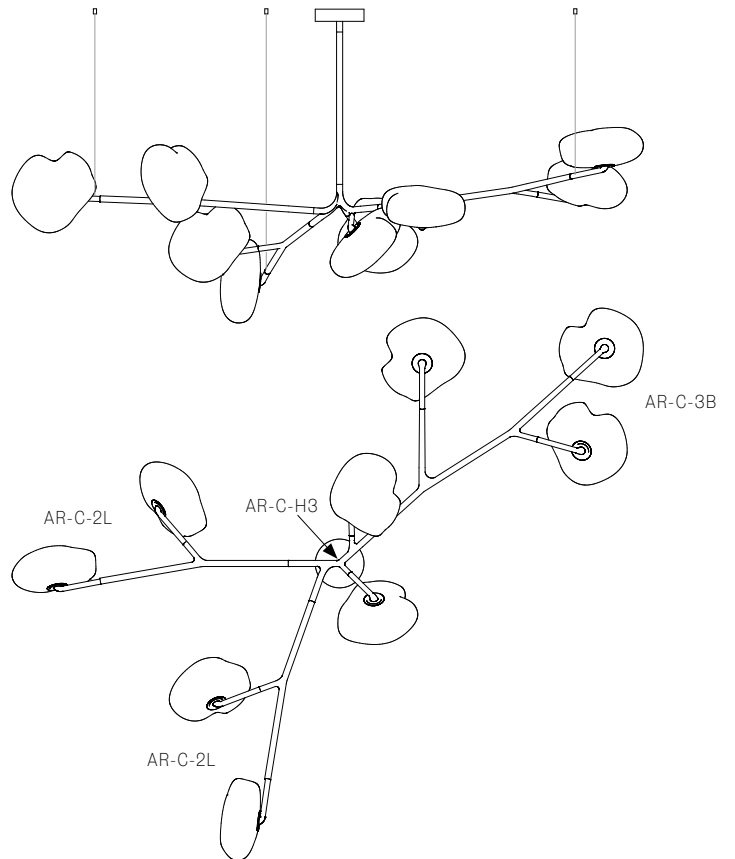
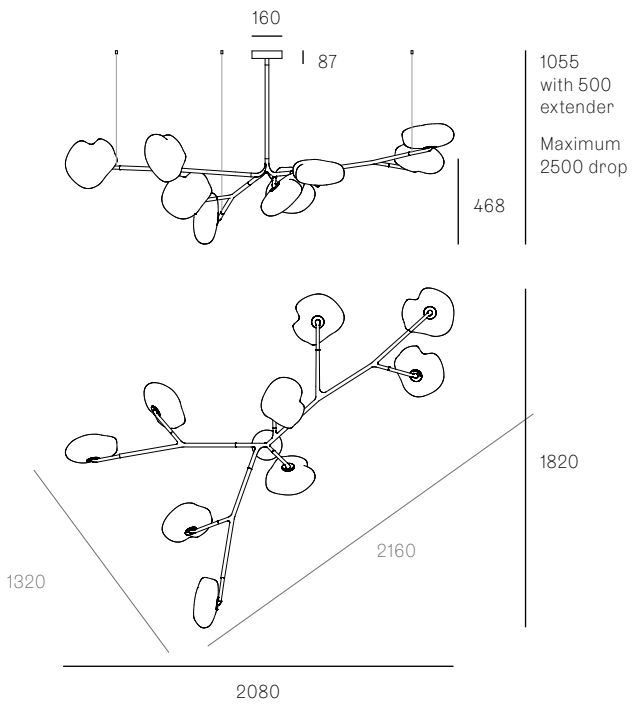


73.9A.2

All dimensions are in millimeters (mm) unless otherwise specified.

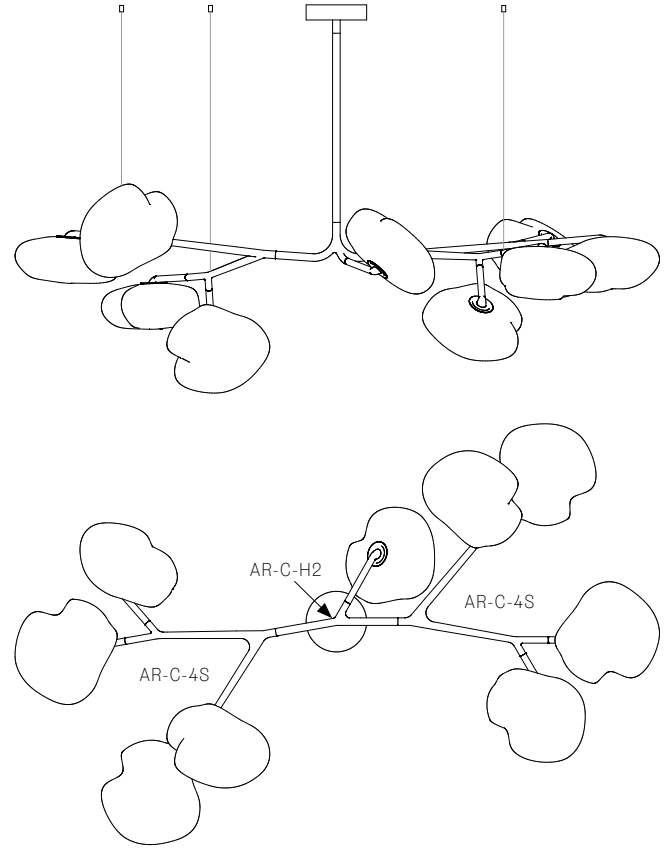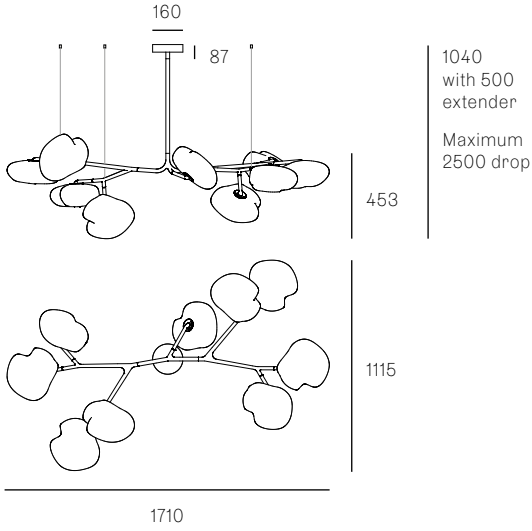


73.11A.1

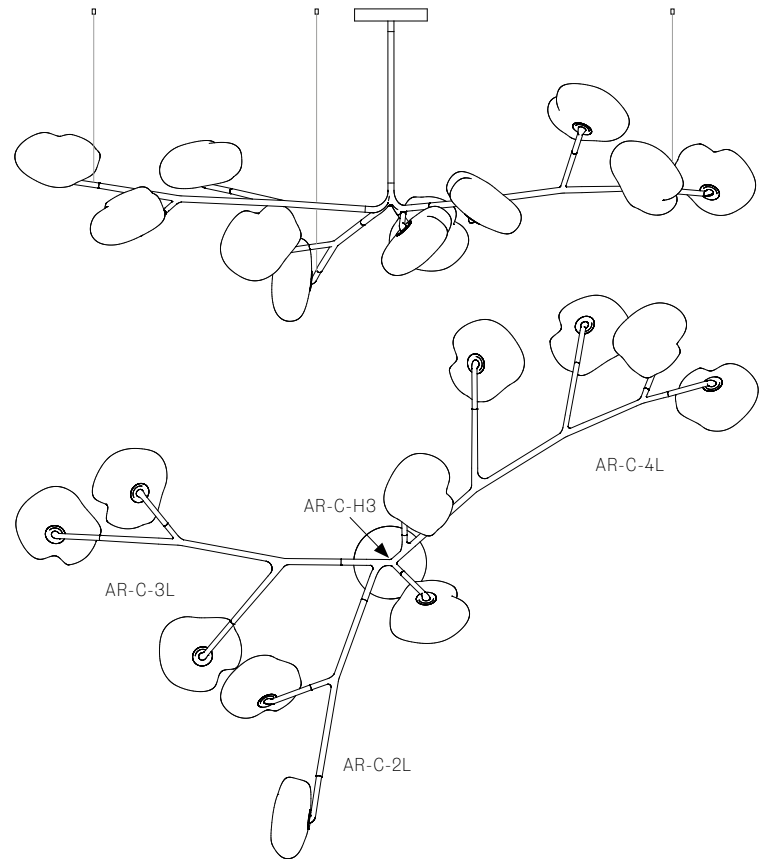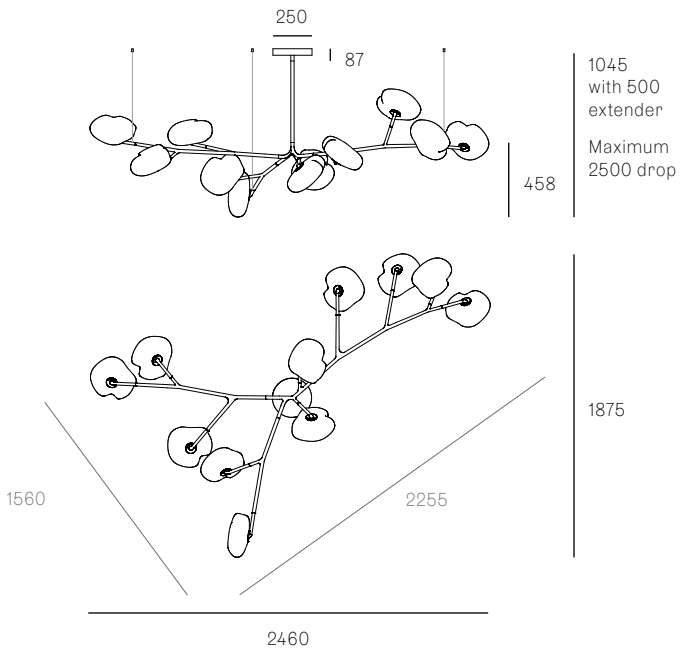


73.11A.2


All dimensions are in millimeters (mm) unless otherwise specified.

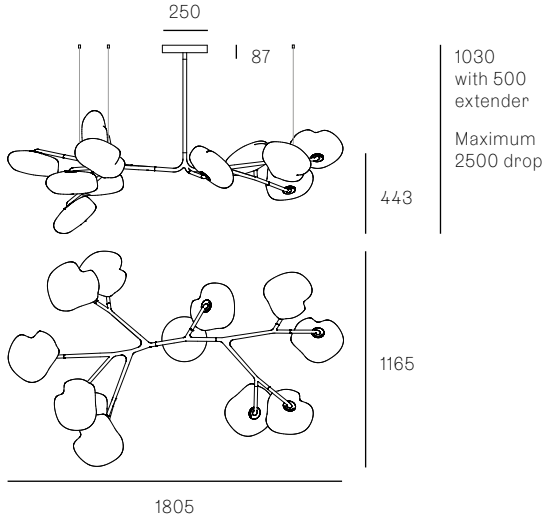


1030  
with 500  
extender  
Maximum  
2500 drop

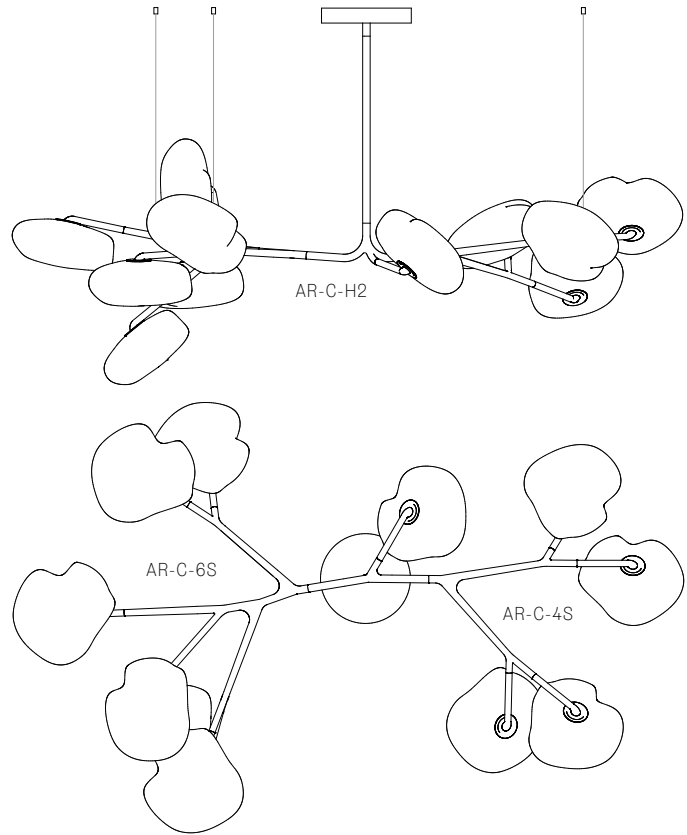

73.13A.1

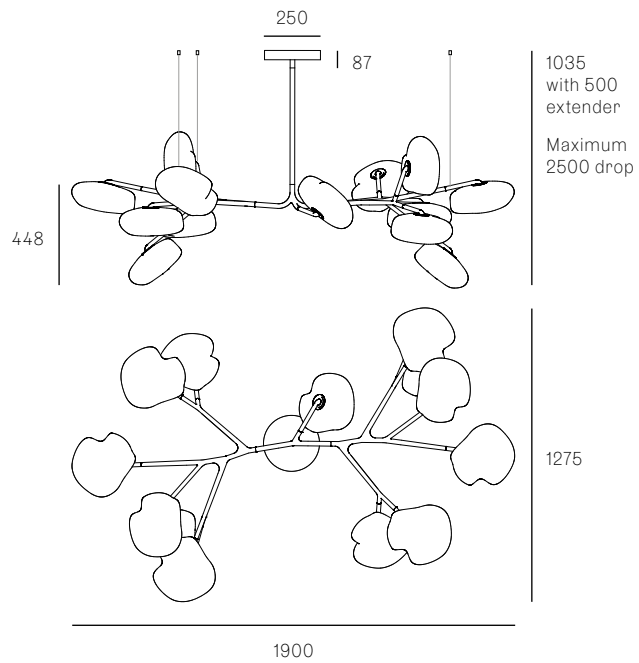


1035  
with 500  
extender  
Maximum  
2500 drop


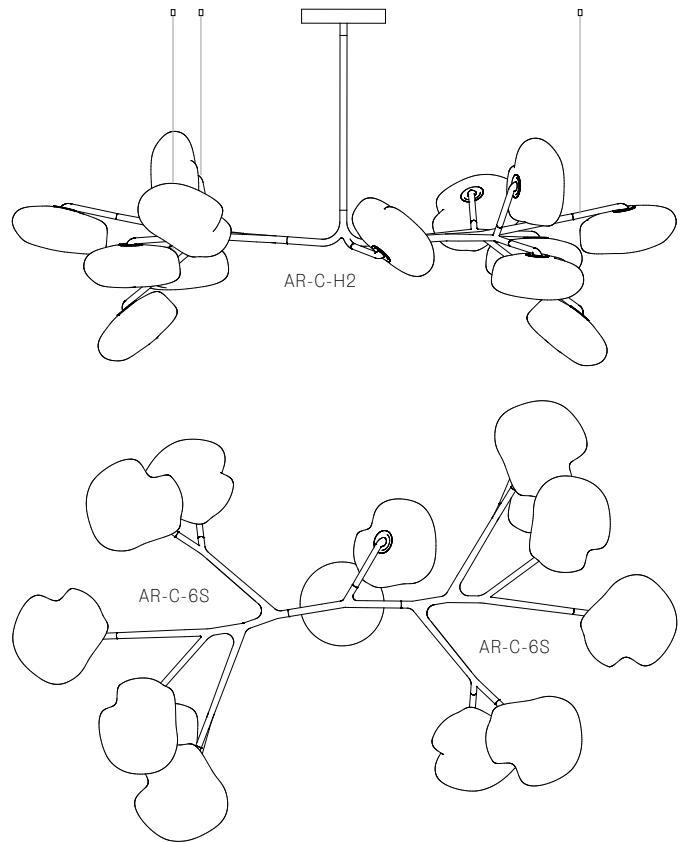


**73.17A.1**


All dimensions are in millimeters (mm) unless otherwise specified.

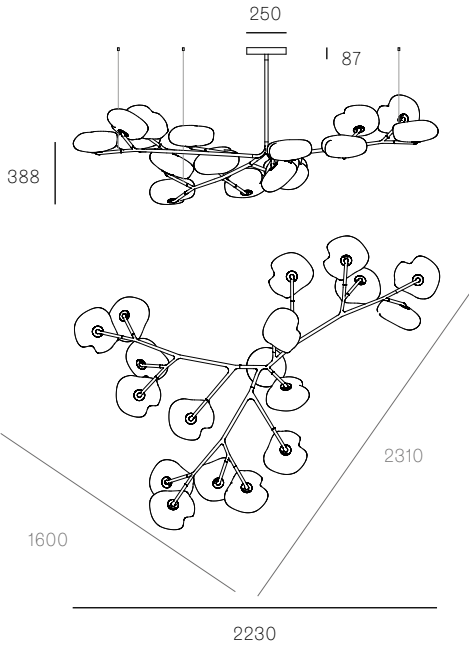



975 with 500 extender  
Maximum 2500 drop

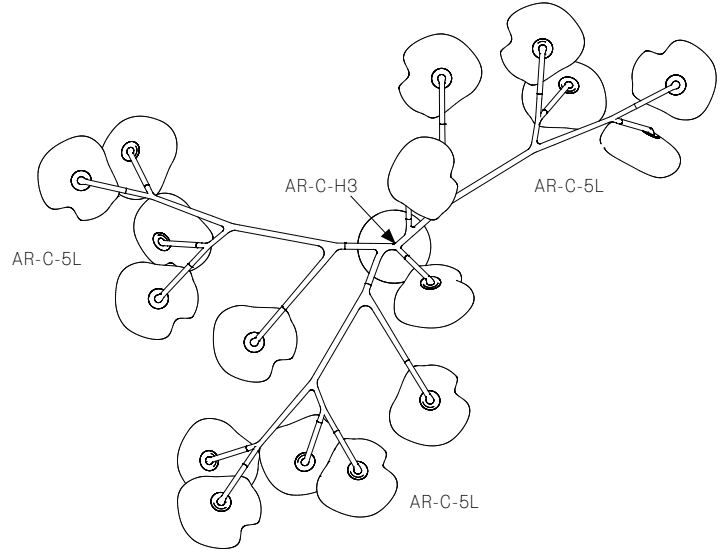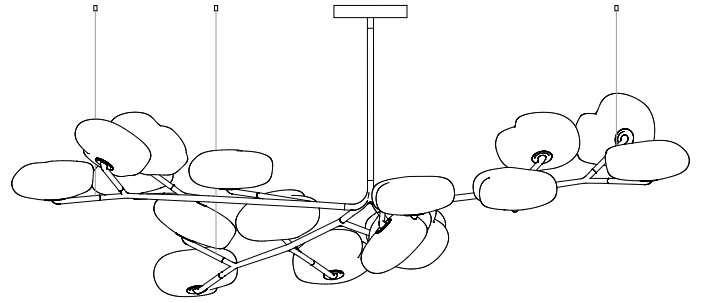

**73.20A.1**


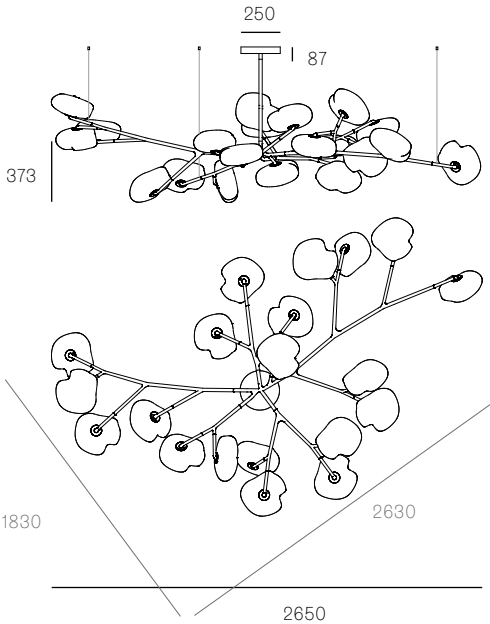


960 with 500 extender  
Maximum 2500 drop

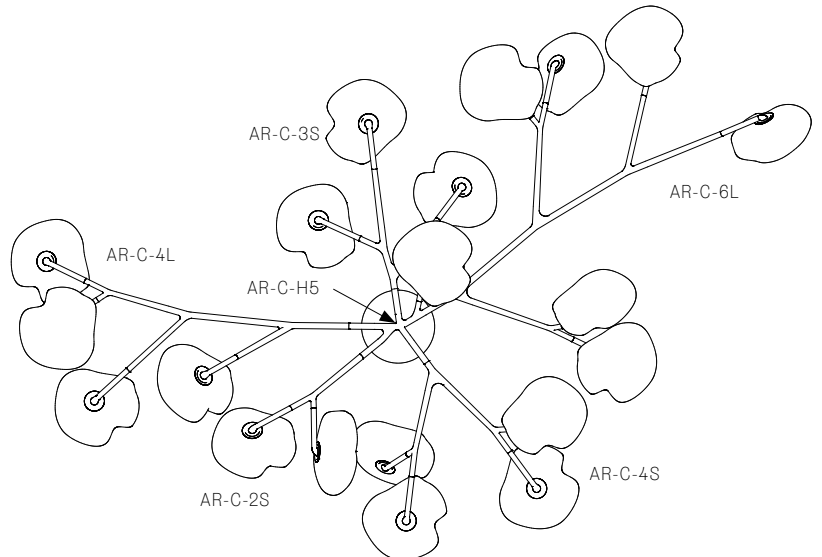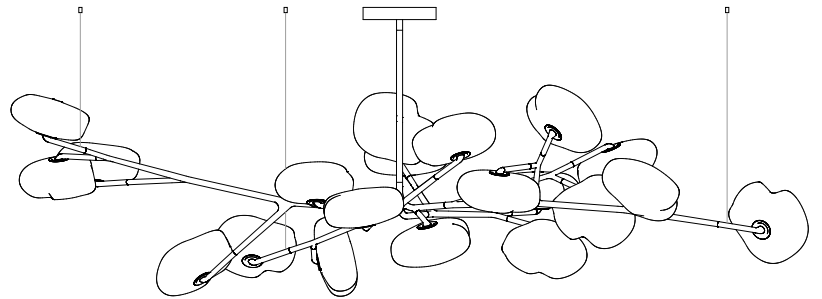

73.23A.1

All dimensions are in millimeters (mm) unless otherwise specified.

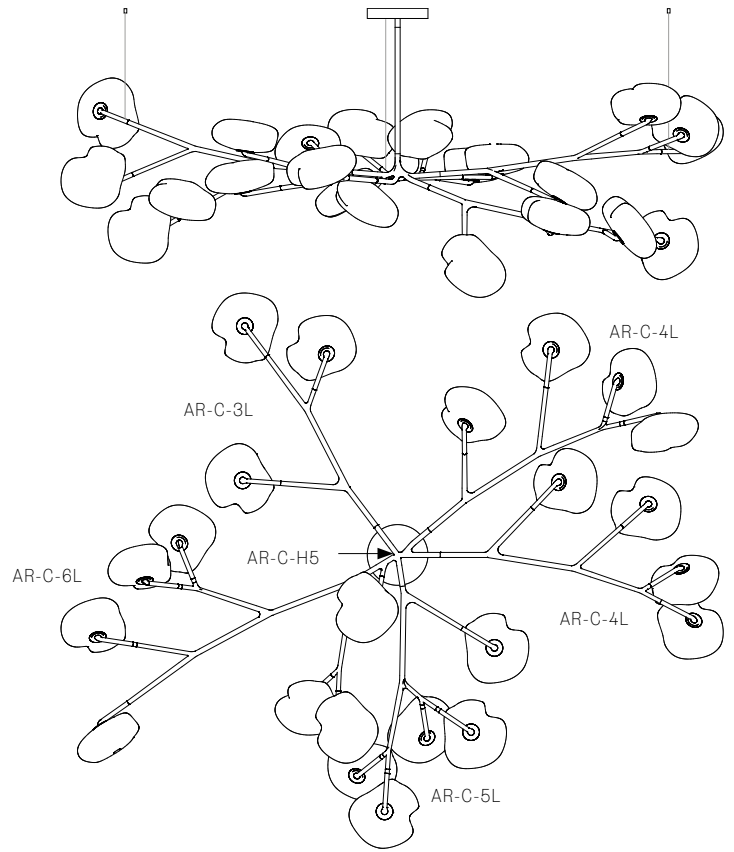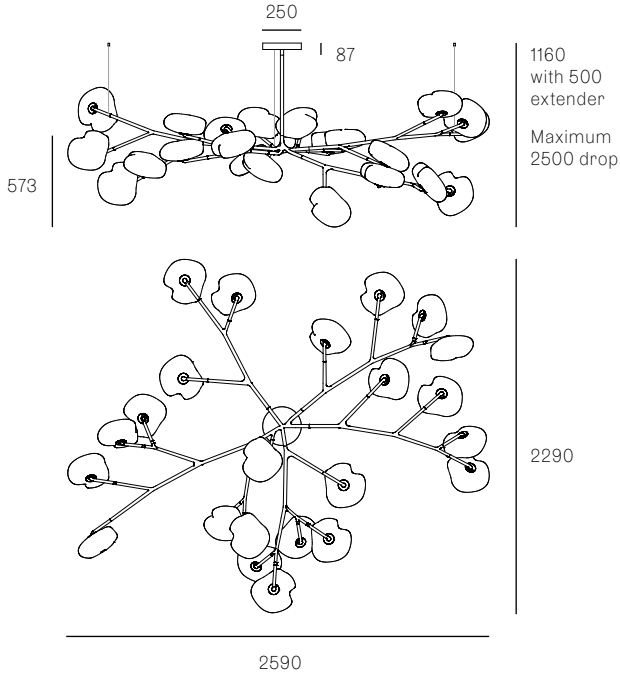

73.33A.1

